SURFACE IRREGULARLY

Product Code

UTAS-2125 Travelling Beam Device

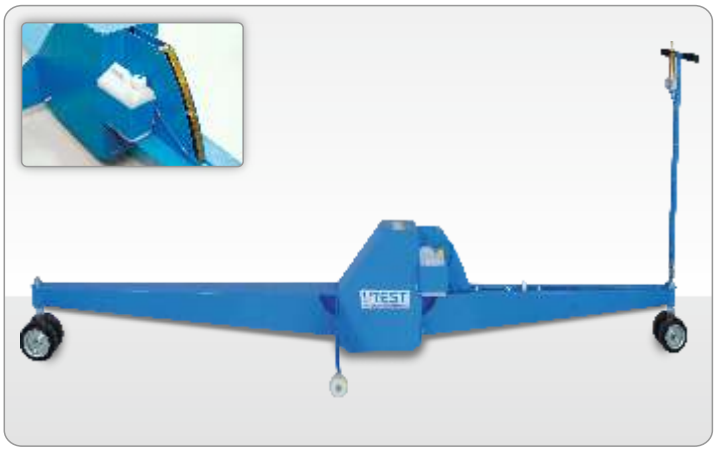

The UTAS-2125 Travelling Beam Device is used to check for any irregularities in both concrete and bituminous road surfaces.

Deviation of the surface from a straight-line is shown on a scale calibrated in increments of 2 mm in the 0-10 mm range and 5 mm increments in the 10-25 mm range It. comprises a manual dye marker which is used to mark irregular surface sections when found.

Dimensions	720x2900x500 mm (packed)
Weight (approx.)	45 kg

ASO 1. Organize Sanayi Ural Caddesi No:18 Sincan-Ankara/TURKEY
P: +90 312 394 3875 (pbx) • P: +90 312 394 3877 • info@utest.com.tr
utestgroup
www.utest.com.tr