



Product Code

- UTC-0520A J-Ring with Smooth Roads, ASTM
UTC-0520AR J-Ring with Rebar Roads, ASTM
UTC-0524 Base Plate, Stainless Steel, for J-Ring
and Slump-Flow Tests
UTC-0402A Slump Cone, Seamless Spun Metal, ASTM


Standards

ASTM C1611, C1621

The J-Ring Test is used for determining the passing ability of self-consolidation concrete. Except J ring, the apparatus can be used for performing the slump-flow test.

The UTC-0520A, J-Ring with Smooth Roads, is manufactured from stainless steel.

The UTC-0524 Base Plate is 920x920x3 mm square, made of stainless steel with engraved circles of 200 mm and 500 mm diameter conforming to EN and ASTM.

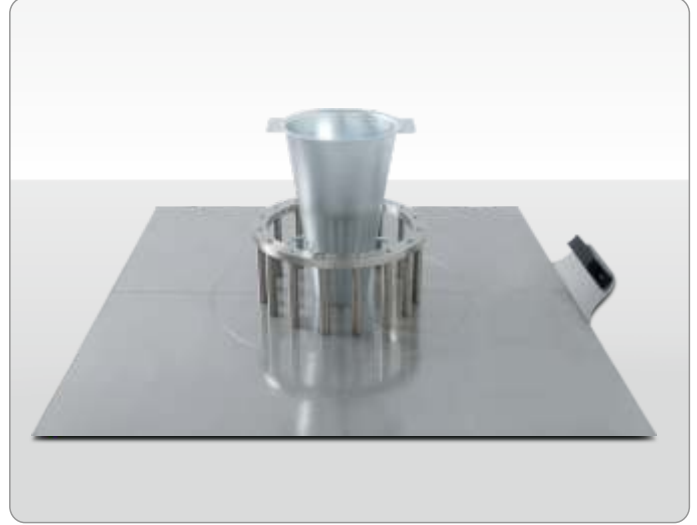

Product Code	Dimensions	Weight (Approx.)
UTC-0520A	330x330x130 mm	7 kg
UTC-0524	920x990x100 mm	21 kg