

CEMENT COMPRESSION & FLEXURAL FRAMES

Product Code

UTC-4630	Distance piece Ø165 mm x 15 mm (Ø6,5"x0,59")
UTC-4631	Distance piece Ø165 mm x 30 mm (Ø6,5"x1,18")
UTC-4633	Distance piece Ø165 mm x 50 mm (Ø6,5"x1,97")
UTC-4634	Distance piece Ø165 mm x 100 mm (Ø6,5"x3,93")
UTC-4116	Upper Loading Platen with Ball Seating Assembly

Distance Pieces for Frame

Due to the modular design of the frames any sample with suitable size, load and pace rate can be test on both chambers by decreasing the distance between platens.

Loading Platens


UTCM-4116 Lower and Upper (spherical seated) Loading Platens. Ø:165 mm

Manufactured from high quality steel are hardened (more than HRC 55), smoothed and finished.

The roughness value for the surface texture of machine platens are 3.2 µm.



Distance Pieces

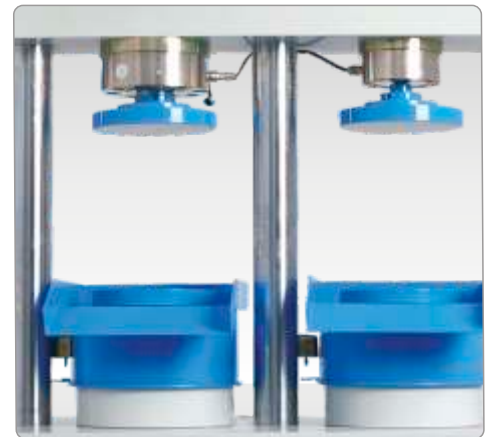

UTCM-4116 Upper Loading Platens